


MIX THUNDER SEPARATES


MTX RECOMMENDS THAT YOU HAVE YOUR NEW SPEAKERS INSTALLED BY AN AUTHORIZED MTX RETAILER, PREFERABLY MECP CERTIFIED.



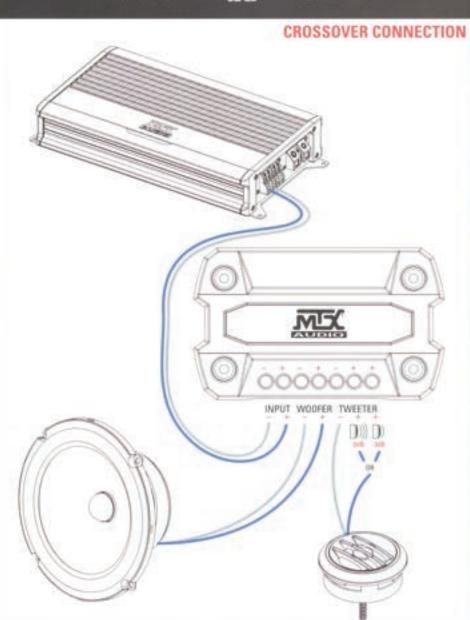

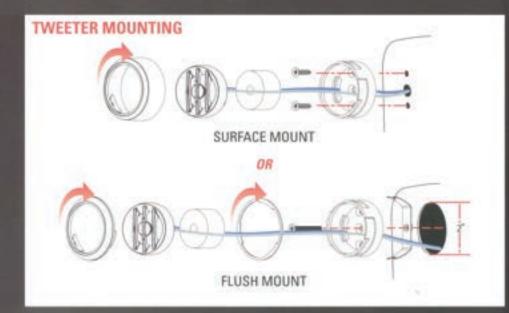

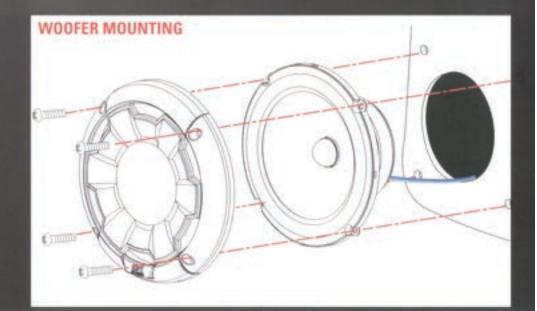














Q CD

to 2010 Medition At these secret. Mile is a company of black disc.

THUNDER51 180W Peak Power 5-1/4" 2-WAY SEPARATES



This box contains a highly sophisticated, performance machine.

The enclosed speakers are designed to deliver the highest levels of clarity. These should only be used by someone that is looking to take their in-car listening experience to a level others have only dreamed about.

If you are one of these people, congratulations!
Use caution when listening to and sharing
your system, prolonged exposure to a high
performance stereo system may cause
jealousy and stereo envy among your friends.

You have been warned.

Now install it, get in, and turn it up.

MTX Audio - Feel the Thunder

SPECIFICATIONS

5-1/4" Wooder with Polygropylene Cone Mounting Depth: 56.078mm 30mm Soft Dome Tweeter 2-way Separate Crossover: 18d8/0d8/oct Power Handling: 90 Watts RMS Power Handling: 180 Watts Peak Sensovity (2.83V/1m): 90d8 Frequency Response: 51Hz-20aHz Impedance: 4 O

ESPECIFICACIONES

Vicofer de 5-1/4 pig, con cono de polipropileno Profundidad de montaje: 56.078mm
Tweeter de docto suavo de 30mm
Crossover de 2 canales separados y: 18d8/6d8/pct
Administración de potencia: 90 vatios RMS
Administración de potencia: 180 vatios máx
Sensibilidad (2.83 V / 1 mi: 90 d8
Respuesta de frecuencias: 51Hz a 20kHz
Impedancia: 4 Ω

WERTE

5-1/4 Zolf Tieftöner mit Polypropylen-Membran Zolf Einbautiefe: 98.078mm 30mm Soft Deme-Hochtöner Seperater Zeverweg-Crossover: 1868/6d8/Okz. Spitzen-Belastbarkeit: 90 Watts RMS. Spitzen-Belastbarkeit: 180 Watts Peak Empfiniflichkeit (2,83 V/1 ml: 90d8 Frequenzgang: 51Hz-20kHz Impedanz: 4 Ω

CARACTERISTIQUES

Hast-parleur de graves de 5° et 1/4 avec côna en polypropyléne Profondeur de mantage de 56.076mm. Hast-parleur d'aigus à cône souple de 30mm 2 filtres séparés 2 voies de: 1808/6dB par octave Puissance admissible de: 90 warts efficaces Fuissance admissible de: 180 watts en crête Sensibilité (2,83 V/1 m): 906B Réponse en fréquence: 51Hz à 20kHz Impédance: 4 Ω














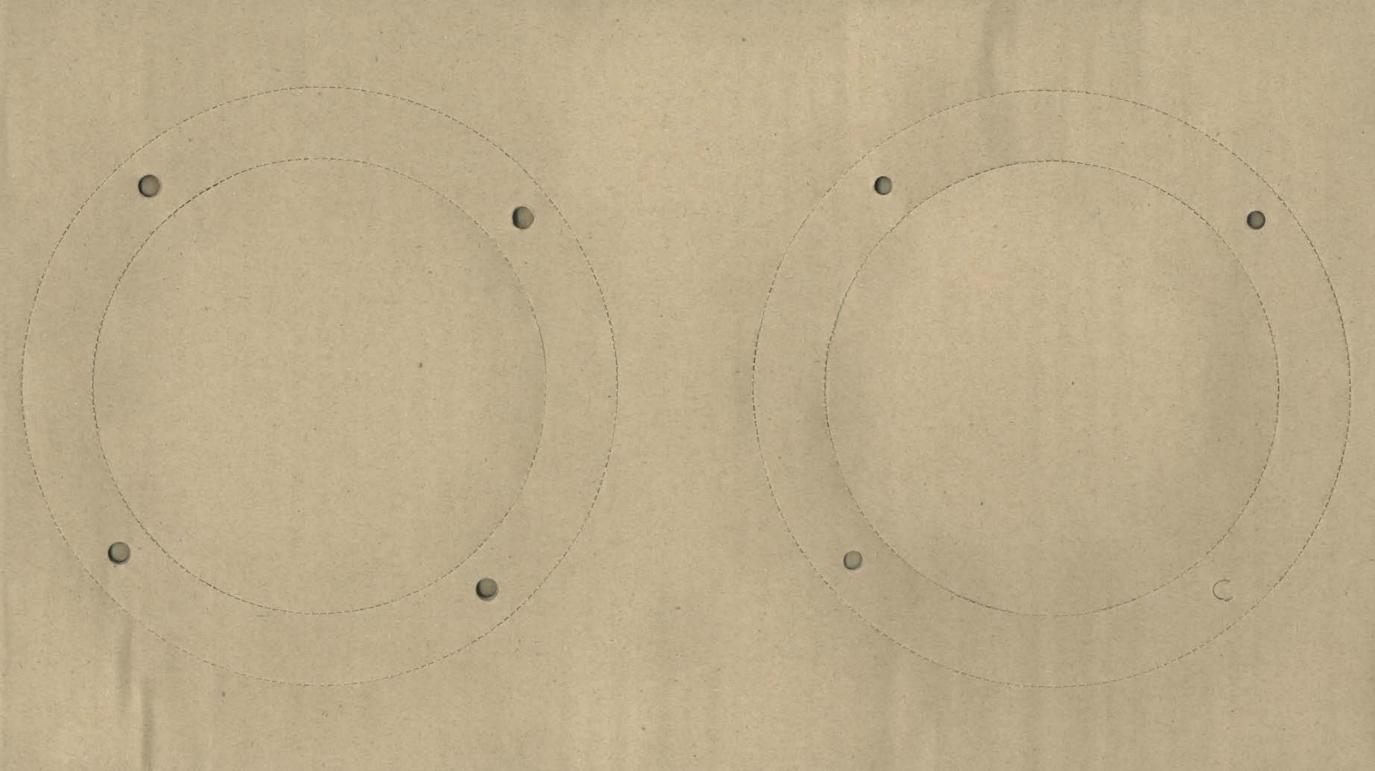



WARRANTY:

This Warranty Statement applies to products purchased in the United States of America only. Products purchased outside the United States of America are subject to the warranty offered by the authorized distributor/retailer in the respective country/area where the product is sold and purchased.

Mitek Mobile products (including MTX, Streetwires, Coustic and Magnum) purchased in the USA from an authorized Mitek retailer are guaranteed to be free from material defects in products and workmanship for five (5) years to the original end user purchaser, subject to the terms and conditions below.

The warranty period begins the day the product is purchased by the end user, and is limited to the original retail purchaser of the product. Products found to be defective in materials or workmanship during the first 2 years will be, at Mitek's option, repaired or replaced by Mitek at no charge. When a product is replaced during first 2 years, the warranty does not renew, it continues on from the original date of purchase. The prorated purchase price of any product which becomes defective after the first two years and prior to the end of the warranty period may be credited toward the purchase of a new Mitek product. The amount of the proration shall be determined by dividing the purchase price by the number of months of the warranty period (60), and then multiplying the result by the number of months remaining in the warranty period. Any partial months will be rounded to the nearest whole month. For example, a product purchased 37 months ago for \$100 would be calculated by dividing \$100 by 60 months = \$1.66/month, multiplied by 23 (the months remaining in warranty period) for a prorated warranty amount of \$38.33.

You are responsible for all costs for removal, re-installation and proper packaging, shipping, insurance or other freight charges incurred in the shipment of the product or part to Mitek. Mitek will ship the repaired or replaced Mitek product or replacement parts to you at no charge. Mitek reserves the right to utilize reconditioned, refurbished, repaired or re-manufactured products or parts in the warranty repair or replacement process. Such products and parts will be comparable in function and performance to an original product or part and warranted for the remainder of the original warranty period.

This warranty does not cover the product if it has been subject to neglect, abuse, misuse, incorrect connection, or if it has been subject to unauthorized repair or alterations of any nature, or if the serial number has been altered or removed, and the warranty does not extend to cosmetics or finish. This warranty only applies to products installed and used in the USA.

Customers in the USA must contact Mitek Warranty via our website at MTX.com, or via email at mitekwarranty@mitekusa.com, or by calling 800-556-2888. If you did not purchase the product directly from Mitek, a proof of purchase must be provided in order to receive warranty consideration. You will be issued a Return Authorization (RA) number which must be written on the outside of the package before returning the product to Mitek.

For more information visit mtx.com.

MTX004773 RevA 12/13 21A10134