



SSV WORKS, 201 N. Rice Ave Unit A, Oxnard, CA 93030
 www.SSVworks.com | Phone: 818-991-1778 | Fax: 866-293-6751

WP3-CMFO+4A

Can-am Commander and Maverick Max

4 Speaker Add-on

WARRANTY INFORMATION:

All SSV Works enclosures are covered by a limited lifetime warranty against defects in material or workmanship. All SSV Works Electronics are covered by a limited 1 year warranty against defects in material or workmanship. All SSV Works Speakers are covered by a limited 1 year warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. Contact SSV Works for further warranty information.



Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

TOOLS NEEDED FOR INSTALLATION

- #3 Phillips Screwdriver - Wire Cutters

PARTS LIST

- | | |
|-------------------------|--------------------------------------|
| 1. WP3-CMFO+4A | 4. Mounting Brackets x 2 |
| 2. M6 x 1.0 Screws x 12 | 5. Single Slot Mounting Brackets x 2 |
| 3. M6 Washers x 12 | 6. Zip Ties |

PARTS LIST IMAGES



1. WP3-CMFO+4A



2. M6 x 1.0 Screws x 12



3. M6 Washers x 12



4. Mounting Brackets x 2



5. Single Slot Mounting Brackets x 2



6. Zip Ties

INSTALLATION NOTES

It is recommended to have another person assist with this installation. The use of a thread locker is recommended on all screws to prevent loosening due to vibration.


INSTALLATION INSTRUCTIONS



A. With one person on either side of the vehicle place the WP3-CMFO+4A into location from the underside of the cage.



B. While holding the enclosure securely toward the middle crossbar of the cage, loosely install the 4 brackets using the screws provided.

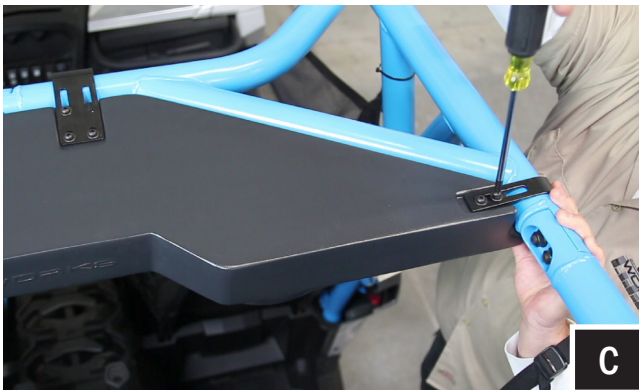

C. Once the enclosure is centered side to side, press the bracket toward the center of the vehicle and tighten the brackets using the #3 screwdriver.

NOTE: After all brackets are tightened, it may be necessary to go back and re-adjust the brackets to ensure the enclosure is properly secured.

WIRING INSTRUCTIONS



Plug in the 4 pin speaker output from the main unit WP3-CM04A into the 4 pin speaker input on the WP3-CMFO+4A, and then secure to the cage using the zip ties provided.



WP3-CMFO+4A