



Mounting the Main Unit

- The Main Unit must only be mounted under the dashboard.



Mounting the GPS Antenna

- The GPS Antenna affixes on the dashboard with the double sided tape.



Mounting the GPRS Antenna

- The GSM/GPRS Antenna affixes to the windshield with the double sided tape.



Hiding the Antennas




Mounting the Optional Camera

- The Camera affixes to the windshield with the double sided tape.



System Wiring

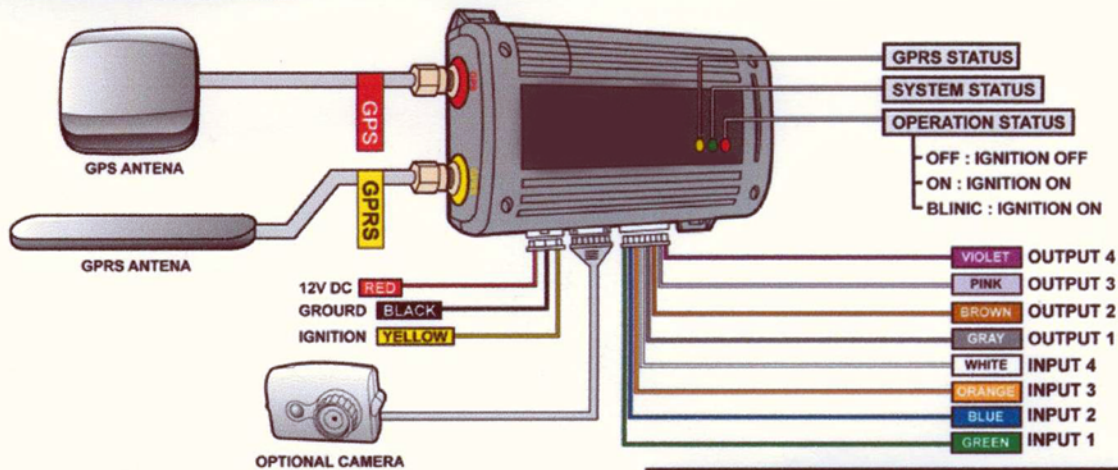

- RED WIRE:** Module Power Input(+). Connect to constant source of +12V.
- BLACK WIRE:** Ground Input(-). The wire must connect to a solid chassis ground. Clean away any paint or dirt to insure the best possible ground.
- YELLOW WIRE:** +12V Ignition Input. The wire must connect to a main ignition wire at the ignition harness. This wire must supply +12V when the ignition is on and while cranking the starter. The power must not be interrupted while the car is starting.

INPUT 1	GREEN	NEGATIVE INPUT (-)
INPUT 2	BLUE	NEGATIVE INPUT (-)
INPUT 3	ORANGE	NEGATIVE INPUT (-)
INPUT 4	WHITE	NEGATIVE INPUT (-)
OUTPUT 1	GRAY	NEGATIVE 500mA (-) PULSE OUTPUT
OUTPUT 2	BROWN	NEGATIVE 500mA (-) PULSE OUTPUT
OUTPUT 3	PINK	NEGATIVE 500mA (-) LATCHED OUTPUT
OUTPUT 4	VIOLET	NEGATIVE 500mA (-) LATCHED ON/OFF OUTPUT