

## Summary



Be safe, be free and express yourself through **ULTRA SLIM**  
**Bluetooth HandsFree Car Kit !!!**


## Features

- **Universal bluetooth handsfree car kit for all kind of bluetooth phone.**  
(Compatible with all kinds of GSM / CDMA / TDMA / WCDMA Bluetooth phones.)
- **Ultra Slim design**
- **Rechargeable Battery Type**
- **Installation on Sun visor Type**
- **Digital noise & echo suppression system.**
- **Full two ways (Duplex) conversation.**
- **Easy set up and simple operation.**
- **Provides the best sound clarity with little or no distortion.** (Superior sound quality)
- **Surge prevention circuit**

## Specification

|                       |                                                                                                                                    |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Regulatory Compliance | CE, FCC, SIG                                                                                                                       |
| Bluetooth Version     | Meets 2.0 Bluetooth Standard                                                                                                       |
| Talk Time             | 12 Hours                                                                                                                           |
| Speaker Power Output  | 2W                                                                                                                                 |
| Operating Temperature | -10°C~+60°C                                                                                                                        |
| Storage Temperature   | -30°C~+70°C                                                                                                                        |
| Buttons               | Volume Up Button, Volume Down Button, Multi Functions Button                                                                       |
| Indicator             | (Red) Power LED, (Red) Low Battery<br>(Blue) Link Indication, (Blue) Call Activity Indication                                      |
| Operating Mode        | Full Duplex with Noise and Echo Cancellation Using DSP                                                                             |
| Battery               | 1100mA Li-Polymer                                                                                                                  |
| Product Dimension     | 60mm (W) X 124mm (L) X 13mm (T)                                                                                                    |
| Package Dimension     | 211mm (W) X 165mm (L) X 41mm (T)                                                                                                   |
| Weight                | 100g                                                                                                                               |
| Accessory             | Car Charger, Clip, User Guide                                                                                                      |
| Compatibility         | This unit is compatible with most Bluetooth equipped cellular phones including Motorola, Sony Ericsson and Nokia, Samsung, LG, Etc |

## Operation Manual

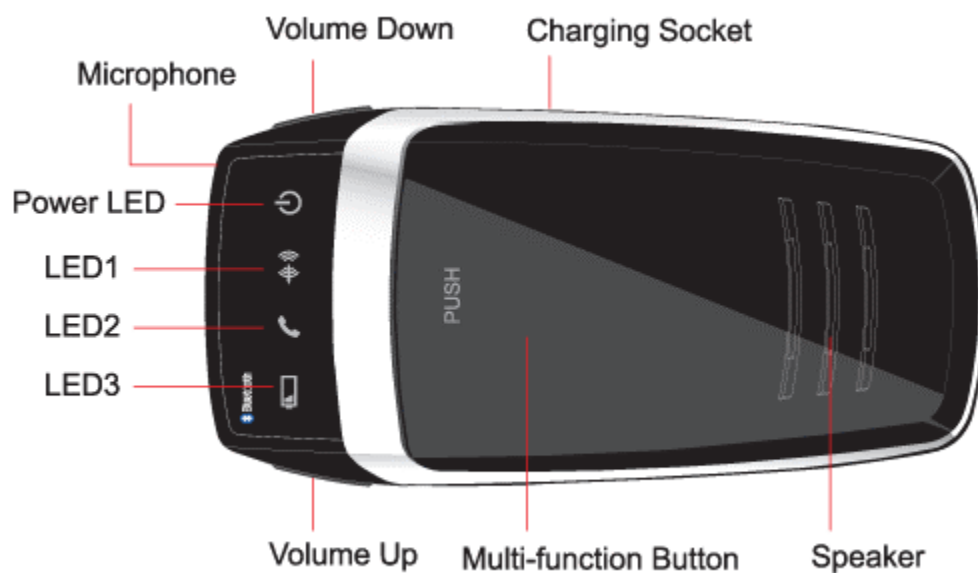

- **Volume up button** - is used during the initial set up.
- **Volume up / down button** - controls the speaker volume.
- **Multi-Function button** - Controls 'Power On/Off', 'Active/Stand-by', and 'Voice Dialling'
- **Status LED Indicators**
  - 1) **Power LED** : Power on Mode
  - 2) **LED 1** : Connecting Status
    - Stand by Mode** : two times blinking every two second
    - Pairing Mode** : blinking continuously.
    - Active Mode** : Power on continuously
  - 3) **LED 2** : Call Activity Status
    - Sending and Receiving Phone Call** : Blinking shortly
    - Active call** : Lightning continuously
  - 4) **LED 3** ( Low battery Status ) : LED blinking continuously

---

## How to Use

### >> Charging HandsFree

Use the vehicle power charger provided.

BHF-200 uses a rechargeable battery that must be fully charged before you use it for the first time. Connect the supplied vehicle power charger to power socket and then to your HandsFree. The status of indicator on Vehicle charger will be illuminated red while charging and change to Green when the HandsFree is fully charged. It takes approximately 2 hours to fully charge the Handsfree.

**NOTICE :** If battery is Low, Red light of the LED 3 will blink in every second.



### >> Pairing your Bluetooth cellular phone with the ULTRA SLIM (BHF-200)

Turn on both devices. For Handsfree, press the **multi-function button for two seconds**.

- 1) Place the Hands-free in pairing mode by pressing and holding the volume down Button for five seconds.  
Release the button when the status indicator(LED1) begin to fast flash with beep sound.

**NOTICE :** If the pairing is not success for two minutes, the Hands-free becomes to stand-by mode.

- 2) Use your phone's menu to search for Bluetooth audio devices and select "BHF-200"
- 3) When the phone display asks for a pass key, enter "0000".

The Bluetooth icon appears on the display, once the hands-free successfully paired.

If the Handsfree stops responding to button presses, you must reset the Handsfree.

### >> Using the ULTRA SLIM (BHF-200) as a Handsfree Device

#### 1) Power On / Off

Press the multifunction buttons for **two seconds in order to turn of the device**.

Press the multifunction buttons for **five seconds in order to turn off the device**.

#### 2) Connect the Hands-free to the phone

When disconnected, the Handsfree can be reconnected to the phone by simply short pressing the multi-function button.

#### 3) Disconnect the Hands-free from the phone

Press the volume up /down button simultaneously for a second.

It is only possible while there is no on going call.

#### **4) Answer / End / Place a call**

To answer a call, short press the multi-function button.

To end a call, long press the multi-function button for two seconds.

To place a call using voice dialing, short press the multi-function button.

If you are on a calling using your phone handset, you can transfer the call to your Handsfree by two times press of the multi-function button.

#### **5) Call transfer back to phone**

To transfer a call from your Handsfree back to your phone, two times press of the Multi-function button.

#### **6) Call reject**

To reject an incoming call without answering when the Handsfree is ringing, long press the multi-function button.

#### **7) Last number redial**

To redial the last number, two times press the multi-function button.

#### **8) Volume Up / Down**

Press the volume up / down button to adjust the volume.

During a call, press the Volume Control Buttons to adjust the volume.

#### **9) Mute / Un-mute**

Press the volume up and down button simultaneously.

#### **10) Auto Power Off**

The power is turned off automatically when the handsfree does not work for one hour.

#### **11) Auto Reconnecting**

BHF-200 automatically reconnect to the last phone used if the BHF-200 is already on.

### **>> Reset HandsFree**

To clean BHF-200, stick a pin into the hole on the back side

## >> Troubleshooting

### **The Handsfree will not turn on**

The Hands-free battery may be flat. Try recharging the HandsFree.

### **Pairing is unsuccessful**

Try moving the phone and HandsFree closer together during pairing.

Make sure that the mobile phone is in the correct Bluetooth mode.

Some electrical devices such as microwave ovens create a noisy electrical environment making it difficult for the HandsFree to communicate with the phone.

Try moving away from such devices and try again.

### **Pairing has succeeded but call are not heard in the HandsFree**

Make sure that your phone is switched on and ready to connect to the HandsFree.

Check your phone user manual on how to do this.

### **The HandsFree stops responding to button presses charged**

Ensure that your Hands-free battery is charged Try resetting your HandsFree according to the directions given in "Resetting your HandsFree" by turning it Off and On again.

## **Battery Care**

Your Hands-free battery will have a long life provided you follow these lines:

- Do not use any accessory to charge your HandsFree other than the one provided for this product.
- Do not charge your HandsFree outdoors.
- Do not charge your HandsFree if the ambient temperature is above 45 degrees Celsius or below 10 degrees Celsius.
- Do not leave your Handsfree connected to the charger for extended periods of time, as excessive charging will reduce battery life.

## >> Safety and General Information

Users are not permitted to make changes or modify the device in anyway.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**This device complies with part 15 of FCC rules. Operation is subject to the following two conditions:**

- (1) This device may not cause harmful interference and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

In addition, the company declares that this Bluetooth HandsFree is in compliance with the essential provisions of Directive EC.

## >> Warranty

ModooTronix Inc. warrants to purchaser that for a period of one (1) year after the date of purchase (the "Warranty Period") of any ModooTronix Inc. Product by Purchaser, the product will substantially conform to ModooTronix Inc. published specifications for the product on the date of purchaser's purchase of the product, subject to the terms herein. Purchaser shall notify ModooTronix Inc. of any non-conformance during the warranty period and obtain a written return material authorization ("RMA") from ModooTronix Inc. for the nonconforming product and return the nonconforming product to ModooTronix Inc., freight prepaid with a statement describing the nonconformity. ModooTronix Inc. exclusive obligation with respect to nonconforming product shall be, at ModooTronix Inc.'s option and expense, to repair or replace such returned item. The foregoing is purchaser's sole and exclusive remedy for breach of warranty by ModooTronix Inc.'s with respect to the product. The warranty set forth above shall not apply to any product, which has not been properly used or handled in accordance with the instructions supplied by ModooTronix Inc. In addition, ModooTronix Inc. 's warranty is void if the product has been repaired, altered, damaged by the faulty installation, misuse, abuse, or which the product defect is attributable to any failure or damage which is beyond the reasonable control of ModooTronix Inc. This warranty applies only to new ModooTronix Inc. products purchased from authorized retail sellers only. The foregoing warranties are the sole warranties, express or implied, given by ModooTronix Inc. in connection with the product, and ModooTronix Inc. disclaims all other warranties, including warranties of merchantability, fitness for a particular purpose and no infringement of third party rights.

ModooTronix Inc. shall not be liable for any special, incidental or consequential damages in connection with the product, even if ModooTronix Inc. has been advised of the possibility of such damages. The liability of ModooTronix Inc. hereunder for all claims shall not exceed the amount paid by purchaser to ModooTronix Inc. for the product sold rise to ModooTronix Inc.'s liability.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by ModooTronix Inc. is under license. Other trademarks and trade names are those of their respective owners.